



NOTE:- ALL STRUCTURE IS FULLY WELDED WITH A NOMINAL FILLET RADIUS OF 5MM.
 - ALL EXTRUSIONS ARE OF GRADE 6063-T5 OR EQUIVALENT.
 - ALL 100X50X3 RHS ARE TO HAVE 6MM RADIUS EDGE.
 - ALL OTHER RHS ARE TO HAVE 3MM RADIUS EDGE.
 - ALL FASTENERS CORROSION RESISTANT STAINLESS STEEL
 - THIS DRAWING IS FOR PONTOON OF TYPICAL DESIGN ENGINEERING EVALUATION SHOULD BE PERFORMED FOR PONTOONS SUITABILITY FOR EACH PARTICULAR INSTALLATION

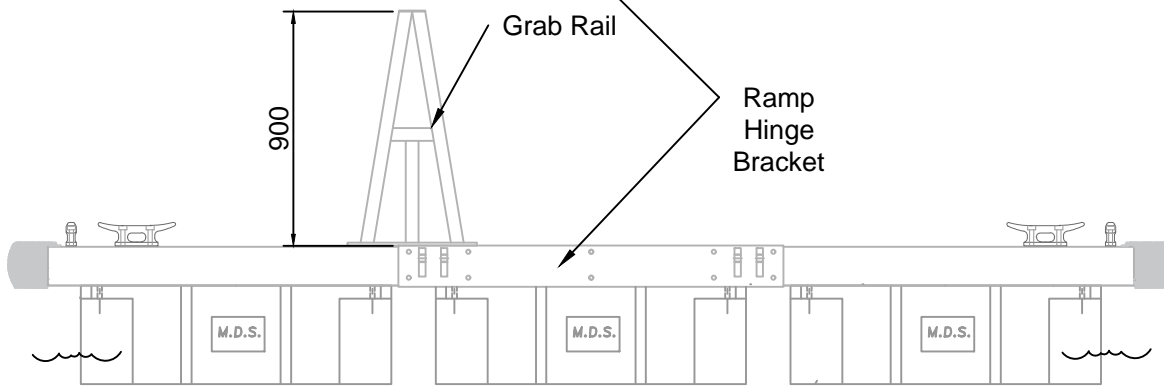

END VIEW

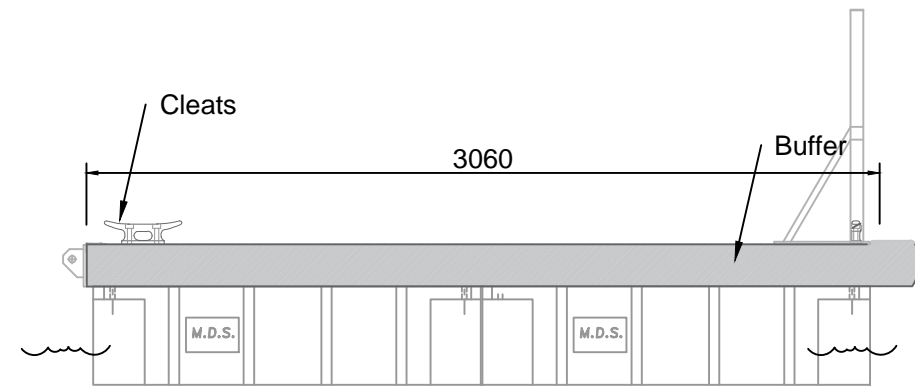

SIDE VIEW