


- NOTE:
- ALL STRUCTURE IS FULLY WELDED WITH A NOMINAL FILLET OF 5mm
 - ALL EXTRUSIONS ARE OF GRADE 6063-T5 OR EQUIVALENT.
 - FILLER ALLOY IS GRADE 5356
 - ALL TIMBER TO BE HARDWOOD WITH MINIMUM OF F17 STRESS GRADE AND CLASS 2 DURABILITY OR BETTER
 - ALL TIMBER IS TO BE TREATED WITH A SUITABLE PRESERVATIVE. (DECKING OIL ETC)
 - ALL FASTENERS ARE CORROSION RESISTANT STAINLESS STEEL.
 - ALL EXPOSED BOLTS ARE TO BE RECESSED INTO THE TIMBER BY COUNTER BORING.
 - ALL BOLT THREADS ARE TO BE TREATED WITH ANTI-SIEZE OR EQUIVALENT LUBRICATING COMPOUND, PRIOR TO FASTENING.

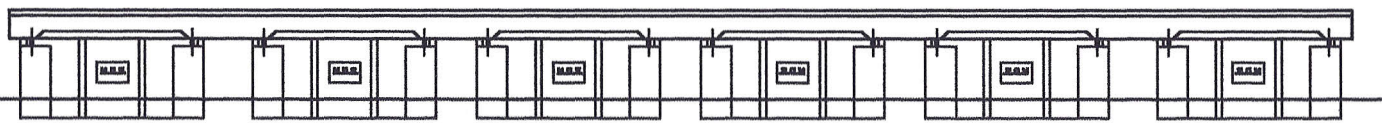

**MARINE DOCK SYSTEMS
PTY LTD**

PAUL MITCHELL
14 REDNAL ST
MONA VALE NSW

PONTOON DETAIL 1



SCALE	N.T.S.	DWG	A4-2956	
DRAWN	JPM	REV	A	23,10,03
DATE	23,10,03	CHK		APP'D